




DELTA®

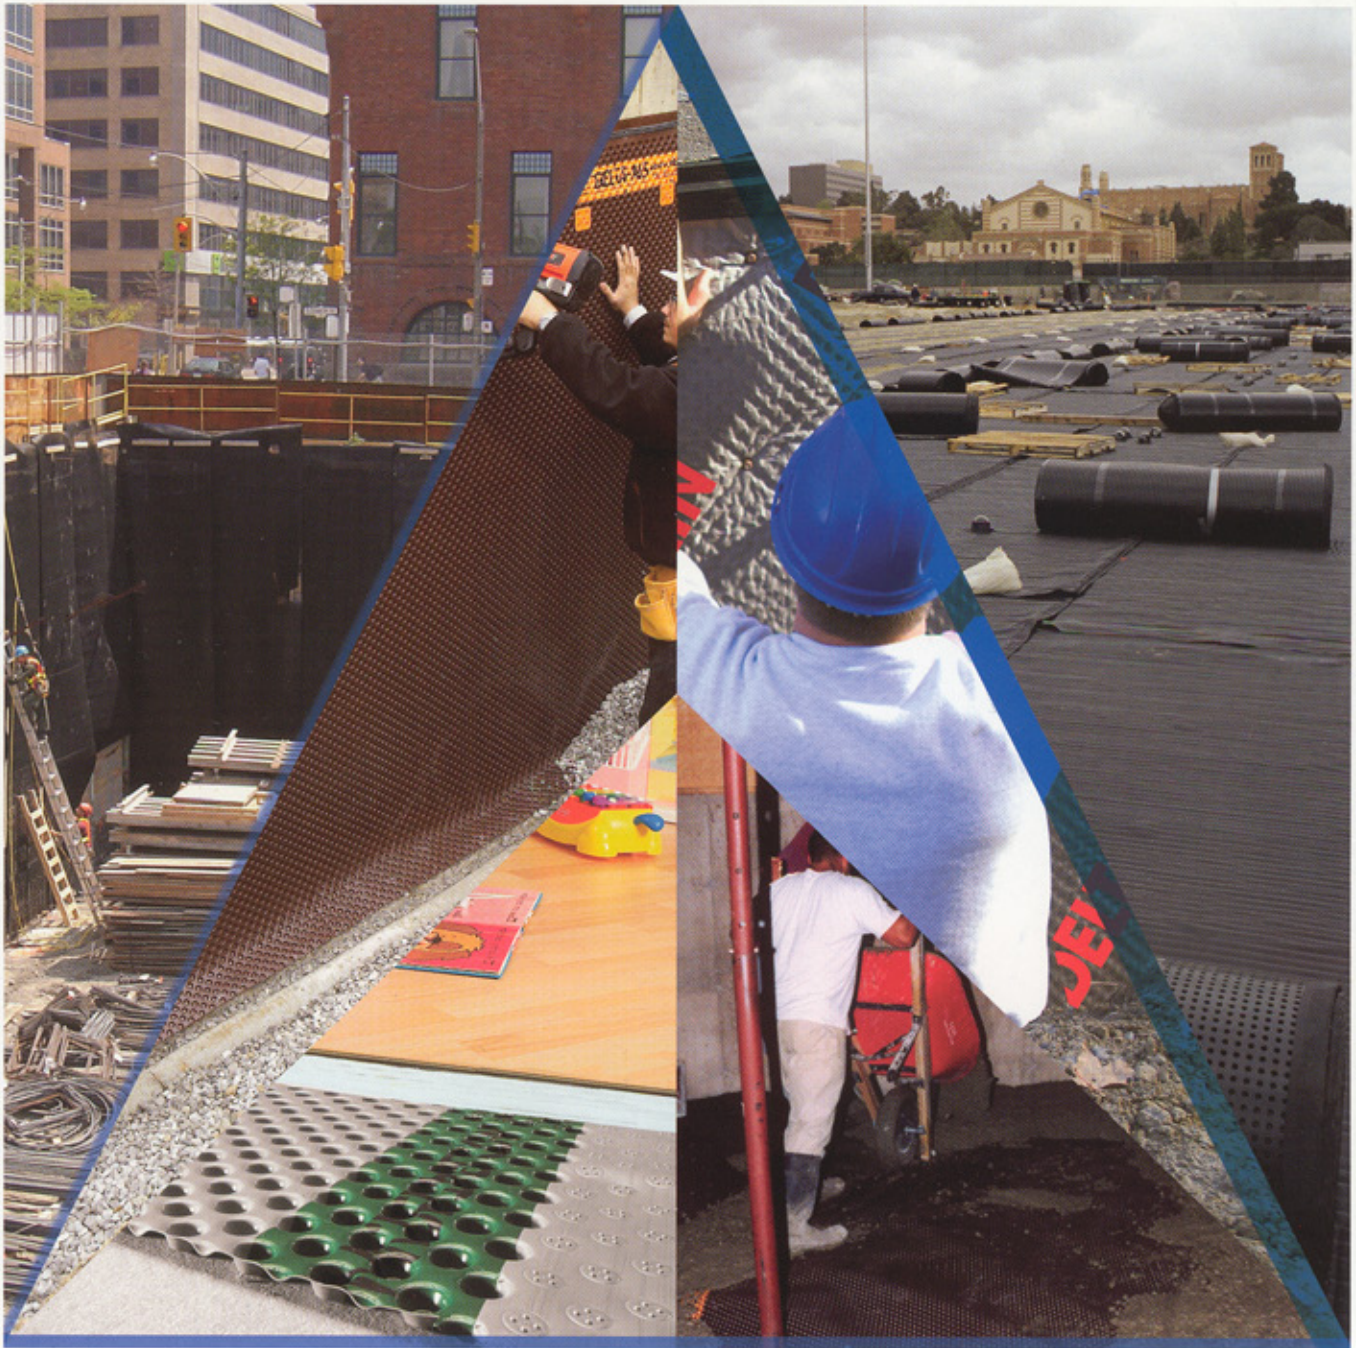

COSELLA  DÖRKEN

DELTA®-DRAIN

The Direct Route For Re-Redirecting Ground Water.™

www.DELTADRAIN.com

DELTA®-MS

The Foundation Wrap.™

www.DELTAMS.com

DELTA®-FL

Keeping Floors Warm & Dry.™

www.DELTAFL.com

DELTA[®]-MS

The Foundation Wrap[™]



DELTA[®]-DRAIN

The Direct Route For Re-Redirecting Ground Water[™]



DELTA[®]-FL

Keeping Floors Warm & Dry[™]



DELTA[®]-MS

Underslab Vapor Retarder.



DELTA[®]-MS is an effective foundation protection system based on a unique vacuum formed High Density Polyethylene (HDPE) dimpled membrane that keeps the foundation out of direct contact with the surrounding fill and soil moisture.

The main component of the DELTA[®]-MS is the "air gap technology", providing a space for transient moisture to dissipate to the foundation drain system. The membrane is very durable, resistant to water entry, and extremely stable. DELTA[®]-MS will not react with soil acids or alkaline solutions making it the perfect choice for shallow residential and light commercial foundations.

DELTA[®]-DRAIN is an efficient and very effective drainage board for the most demanding drainage needs in your residential, commercial or industrial projects. The drainage capacity of our drainage boards coupled with a variety of filter fabrics (heat bonded, needle punch, and woven) offer the end user a great alternative to the conventional drainage systems (granular backfill) used on large-scale projects. DELTA[®]-DRAIN is an excellent protection board over waterproofing and relieves hydrostatic pressure against subterranean structures. DELTA[®]-DRAIN is offered in 6' and 8' widths, making it the industries best choice for application with added savings of less material waste.

DELTA[®]-FL is our answer to moisture control in your residential finished basement or "slab on grade" project when humidity and moisture are problematic. The "air gap technology" provides conditions that would make your finished flooring warmer and dryer by helping you control the dampness in your basement. The membrane provides an air circulation area under the membrane which "dissipates" vapor moisture that comes from under your floor slab and stops this moisture from affecting the finished flooring materials. This produces a warmer and dryer living condition. DELTA[®]-FL is the perfect retrofit for any basement or "slab on grade" project needing vapor moisture control.

DELTA[®]-MS Underslab has become the preferred choice to the typical barriers used for underslab moisture protection. The DELTA[®]-MS membrane is so durable and water impermeable, when detailed properly, that it has been used as underslab waterproofing. The DELTA[®]-MS Underslab application provides an effective barrier to bleed water loss from concrete which enhances the curing process effectively reducing cracking due to excessive shrinkage. DELTA[®]-MS Underslab is the perfect choice for the commercial and industrial construction project.

COSELLA-DÖRKEN PRODUCTS INC.
4655 Delta Way, Beamsville, ON, Canada L0R 1B4
Tel. +1 (905) 563-3255 Fax +1 (905) 563-5582
Toll Free 1-888-4 DELTA 4
cdsales@cosella-doerken.com
www.DELTAMS.com www.DELTADRAIN.com www.DELTAFL.com

© DELTA is a registered trademark of Ewald Dörken AG, Herdecke, Germany



COSELLA DÖRKEN